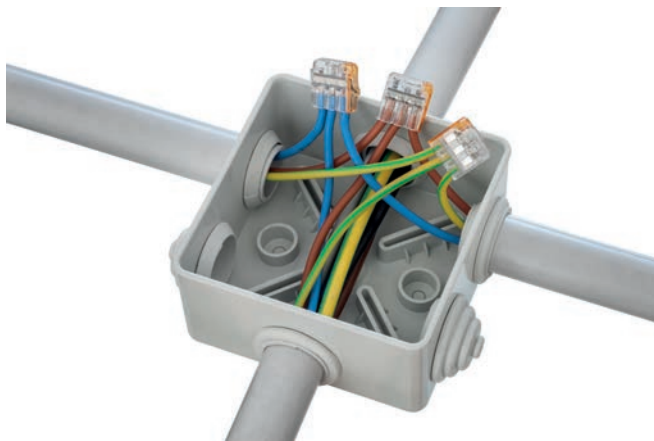


SERIES 3500 compact








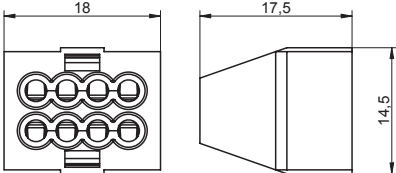

Used for push-in connections in installations and electrical appliances.



Raw materials:

Body: transparent polycarbonate. V0 (according to UL94).

Insert: stainless steel.

3502c 		 10.000 pcs. 360x350x300 mm	 10,7 Kg	
		 100 pcs. 90x65x55 mm	 0,11 Kg	
 2,5 mm² / 0,5 mm²		Voltage 450V	Current rating 24A	 85°C
3503c 		 6.000 pcs. 320x330x370 mm	 9,00 Kg	
		 100 pcs. 100x75x70 mm	 0,15 Kg	
 2,5 mm² / 0,5 mm²		Voltage 450V	Current rating 24A	 85°C
3504c 		 6.000 pcs. 330x320x370 mm	 11,4 Kg	
		 100 pcs. 100x75x70 mm	 0,19 Kg	
 2,5 mm² / 0,5 mm²		Voltage 450V	Current rating 24A	 85°C
3505c 		 6.000 pcs. 370x370x370 mm	 13,8 Kg	
		 100 pcs. 115x85x70 mm	 0,23 Kg	
 2,5 mm² / 0,5 mm²		Voltage 450V	Current rating 24A	 85°C
3508c 		 3.000 pcs. 320x330x370 mm	 13,2 Kg	
		 50 pcs. 100x75x70 mm	 0,22 Kg	
 2,5 mm² / 0,5 mm²		Voltage 450	Current rating 24A	 85°C