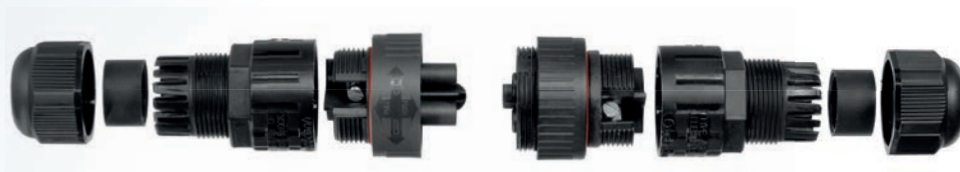




SERIES WP68







PLUG AND SOCKET


PLUG PLUGGABLE CONNECTOR 2 POLES



WP2/M		 25 pcs.	150x120x110 mm	 0,46 Kg
SOLID CABLE  0,5 -2,5 mm ²	FLEXIBLE CABLE  1,0 -2,5 mm ²	 		 <i>Works with: WP2/H and WP2/EH</i>
Cable seals included Ø7mm, Ø8mm Ø9,5mm		 0,6 Nm	 M 3	 -40°C +85°C
Voltage 450V	Current rating 17,5A			



SOCKET PLUGGABLE CONNECTOR 2 POLES

WP2/H		 25 pcs.	150x120x110 mm	 0,51 Kg
SOLID CABLE  0,5 -2,5 mm ²	FLEXIBLE CABLE  1,0 -2,5 mm ²	 		 <i>Works with: WP2/M</i>
Cable seals included Ø7mm, Ø8mm Ø9,5mm		 0,6 Nm	 M 3	 -40°C +85°C
Voltage 450V	Current rating 17,5A			

PLUG PLUGGABLE CONNECTOR 2 POLES + 				
WP3/M		 25 pcs.	150x120x110 mm	 0,52 Kg
SOLID CABLE  0,5 -2,5 mm ²	FLEXIBLE CABLE  1,0 -2,5 mm ²	 46,5 ⁺² mm Ø 25,5 mm		 <i>Works with: WP3/H, WP3/EH and WP3/DTE</i>
Cable seals included Ø8mm, Ø9,5mm Ø11,5mm		 0,6 Nm	 M 3	 -40°C +85°C
Voltage 450V	Current rating 17,5A			

SOCKET PLUGGABLE CONNECTOR 2 POLES + 				
WP3/H		 25 pcs.	150x120x110 mm	 0,57 Kg
SOLID CABLE  0,5 -2,5 mm ²	FLEXIBLE CABLE  1,0 -2,5 mm ²	 50,5 ⁺² mm Ø 25,5 mm		 <i>Works with: WP3/M</i>
Cable seals included Ø8mm Ø9,5mm Ø11,5mm		 0,6 Nm	 M 3	 -40°C +85°C
Voltage 450V	Current rating 17,5A			

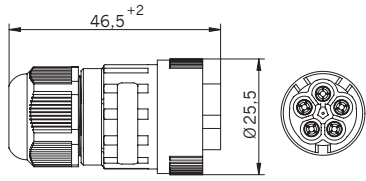

PLUG PLUGGABLE CONNECTOR 4 POLES				
WP4/M		 25 pcs.	150x120x110 mm	 0,58 Kg
SOLID CABLE  0,5 -2,5 mm ²	FLEXIBLE CABLE  1,0 -2,5 mm ²	 46,5 ⁺² mm Ø 25,5 mm		 <i>Works with: WP4/H and WP4/EH</i>
Cable seals included Ø8mm Ø9,5mm Ø11,5mm		 0,6 Nm	 M 3	 -40°C +85°C
Voltage 450V	Current rating 17,5A			

SOCKET PLUGGABLE CONNECTOR 4 POLES				
WP4/H		 25 pcs.	150x120x110 mm	 0,58 Kg
SOLID CABLE  0,5 -2,5 mm ²	FLEXIBLE CABLE  1,0 -2,5 mm ²	 50,5 ⁺² mm Ø 25,5 mm		 <i>Works with: WP4/M</i>
Cable seals included Ø8mm Ø9,5mm Ø11,5mm		 0,6 Nm	 M 3	 -40°C +85°C
Voltage 450V	Current rating 17,5A			

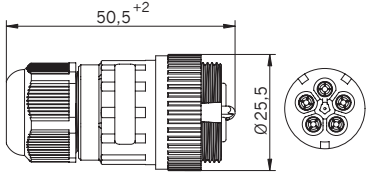

SERIES WP68



PLUG PLUGGABLE CONNECTOR 4 POLES +

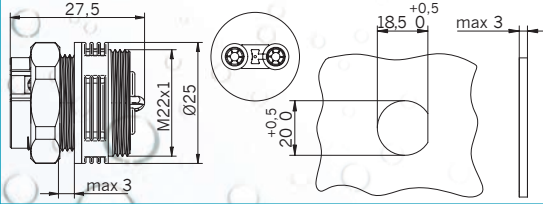
WP5/M		 25 pcs.	150x120x110 mm	 0,53 Kg
SOLID CABLE  0,5 -1,5 mm ²	FLEXIBLE CABLE  1,0 -1,5 mm ²			 <i>Works with: WP5/H and WP5/EH</i>
Cable seals included Ø9,5mm Ø11,5mm Ø12,5mm		 0,6 Nm	 M 2,5	 -40°C +85°C
Voltage 450V	Current rating 15A			

SOCKET PLUGGABLE CONNECTOR 4 POLES +

WP5/H		 25 pcs.	150x120x110 mm	 0,56 Kg
SOLID CABLE  0,5 -1,5 mm ²	FLEXIBLE CABLE  1,0 -1,5 mm ²			 <i>Works with: WP5/M</i>
Cable seals included Ø9,5mm Ø11,5mm Ø12,5mm		 0,6 Nm	 M 2,5	 -40°C +85°C
Voltage 450V	Current rating 15A			

PANEL MOUNT CONNECTORS

SOCKET PANEL MOUNT CONNECTOR 2 POLES

WP2/EH		BUILT - IN		 25 pcs.	150x120x110 mm	 0,34 Kg
SOLID CABLE  0,5 -2,5 mm ²	FLEXIBLE CABLE  1,0 -2,5 mm ²				 <i>Works with: WP2/M</i>	
Voltage 450V	Current rating 17,5A	 0,6 Nm		 M 3		 -40°C +85°C

TEE CONNECTORS

WP3/DT



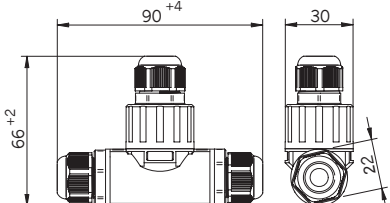

WP3/DTE



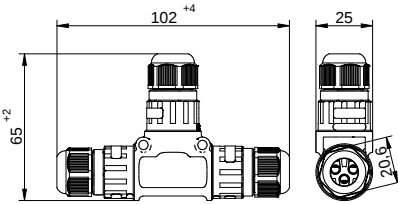

Connector leads
WP3/M

Power supply with connector
WP3/HEM

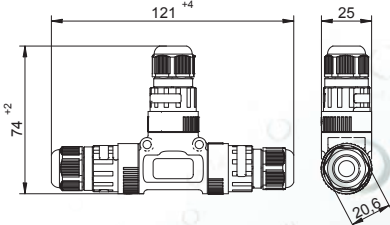
TEE CONNECTOR 1 INPUT / 2 OUTPUTS - 2 POLES

WP2/DT		6 pcs.	150x120x110 mm	0,29 Kg
SOLID CABLE  0,75 -1,5 mm ²	FLEXIBLE CABLE  0,75 -1,5 mm ²			
Cable seals included Ø7mm Ø8mm Ø9,5mm		 0,5 Nm	 M 3	 -40°C +85°C
Voltage 450V	Current rating 24A			

TEE CONNECTOR 1 INPUT / 2 OUTPUTS - 2 POLES +

WP3/DT		6 pcs.	150x120x110 mm	0,32 Kg
SOLID CABLE  0,75 -1,5 mm ²	FLEXIBLE CABLE  0,75 -1,5 mm ²			
Cable seals included Ø8mm Ø9,5mm Ø11,5mm		 0,5 Nm	 M 3	 -40°C +85°C
Voltage 450V	Current rating 32A			

TEE CONNECTOR 1 INPUT / 2 OUTPUTS - 2 POLES +

WP3/DTE		25 pcs.	150x120x110 mm	0,32 Kg
Power supply with connector WP3/HEM Connector leads WP3/M		 -40°C +85°C Voltage/Current rating 450V /32A	